




12 mm x 28 mm x 8 mm NTN 6001LLB deep groove ball bearings

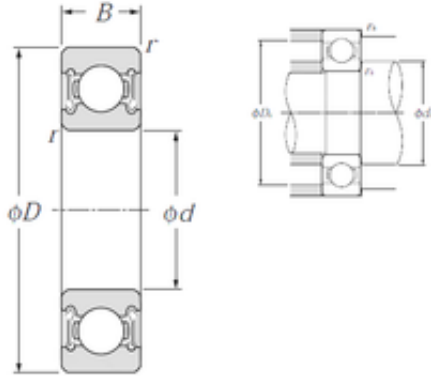

Bearing No. 6001LLB

6001LLB Bearing 2D drawings and 3D CAD models

Size	12x28x8 mm
Bore Diameter	12 mm
Outer Diameter	28 mm
Width	8 mm
d	12 mm
D	28 mm
B	8 mm
C	8 mm
r min.	0,3 mm
da min.	14 mm
da max	16 mm
Da max.	26 mm
ra max.	0,3 mm
Weight	0,021 Kg
Basic dynamic load rating (C)	5,1 kN
Basic static load rating (C0)	2,39 kN
(Grease) Lubrication Speed	26 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.02
EAN	4547359003574
Product Group	B00308
Enclosure	2 Seals



BEARINGS IMPORTED AND EXPORTED CO.,LTD.

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	12MM Bore; 28MM Outside Diameter; 8MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6001LLB/2AS
Weight / LBS	0.045
Outer Race Width	0.315 Inch 8 Millimeter
Outside Diameter	1.102 Inch 28 Millimeter
Bore	0.472 Inch 12 Millimeter
bore diameter:	12 mm
static load capacity:	2390 N
outside diameter:	28 mm
precision rating:	ISO Class 0
overall width:	8 mm
finish/coating:	Uncoated



BEARINGS IMPORTED AND EXPORTED CO.,LTD.

bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	8 mm
snap ring included:	Without Snap Ring
outer ring width:	8 mm
internal clearance:	CN
maximum rpm (grease):	26000 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	0.3 mm
dynamic load capacity:	5100 N
manufacturer product page:	Click here